

## GLOW PLUG DRILL KIT - M12X1.25

# 600 200-8  
Extractor 4.5mm  
type 1 for glow  
plug electrode

# 600 200-15  
Extractor 3.5mm  
type 0 for glow  
plug electrode

# 600 242-5  
Left hand spiral  
point tap M8, TIN




# 600 200-9  
Extractor 8.25mm  
type 2 for glow  
plug electrode

# 600 242-10  
Glow plug left  
hand drill

# 600 200-12  
Adapter

# 600 242-14  
Tap M12 x 1.25

# 600 242-6  
Left hand extractor  
M8 x 120




# 600 242 Glow Plug Drill kit M12x1.25

verkstedutstyr.no



## GLOW PLUG DRILL KIT - M12X1.25

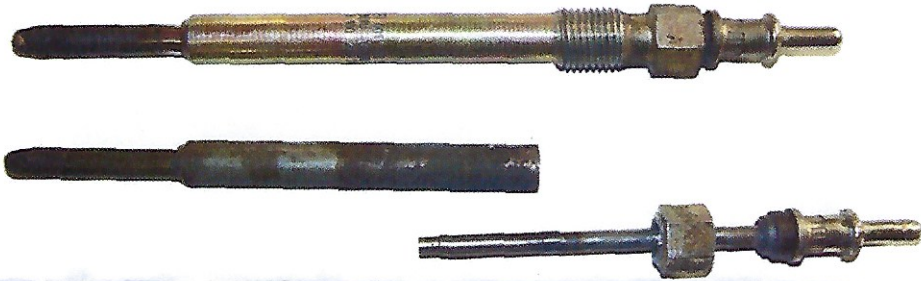

# 600 121  
Small slide hammer

Remove broken glow plugs effectively and safely in 5 easy steps

1. Break the electrode by turning counter clockwise with socket;
2. Drill pitch away with special 3 fluted step drill;
3. Tap the left thread inside the remaining glowplug piece;

4. Extract the last pitches with thread tap and clean up the hole;
5. Remove remaining portion of glow plug with extractor and slide hammer.

Set comes in a metal box with a straightforward picture manual.

# 600 242      **Glow Plug Drill kit M12x1.25**

Wear safety goggles. Use tool properly. Keep threads clean. Maintain tool properly. Keep tool away from children. Read + follow instructions. Do not use on live electric circuits. This tool is made to be used only by experienced personnel. No warranty on bendend or broken parts of this kit.

### WARNING

- All parts can cause flying chips. All parts can break or bend. Users and bystander have to wear safety goggles.
- This kit can damage or destroy the vehicles cylinder head or other parts of vehicles.
- Tap pos. 4 cuts clockwise (right hand version) only for cleaning the original thread into cylinder head.
- Broken parts can cause injury. Drill and tap pos. 2+3 cut counterclockwise (left-hand version).

